

P11/P11P/P11G

Color Screen Entry-level IP Phone

This easy-to-use color screen IP phone can help you improve work efficiency and ensure high-quality voice communication. Equipped with a 2.4-inch 320*240px color display with an adjustable backlight, it provides users with high-resolution graphics and a colorful experience. The P11/P11P/P11G supports 2 SIP accounts, P11/P11P integrated 100M dual Ethernet ports, the P11G integrates gigabit dual Ethernet ports, and PoE (P11P/G only) for easy network connection. And it supports HD voice technologies including wideband codec G.722 and opus for high-quality calls. In addition, it is easy to set up at 60 and 45 angles on a desk or 15-angle mount on the wall, meeting different application scenarios.



All-new Design, Practical details

P1X Series IP phones provides a new intuitive interface design and a 2.4-inch 320*240px color display with an adjustable backlight, which brings a clear and colorful visual experience to users.

HD Voice Quality, Better Calling Experience

Featuring HD voice technologies Wideband Codec G.722 and Opus, the P11/P11P/P11G delivers excellent sound quality and allows fluent conversations.

Online Management Platforms, Easy Deployment

P1X Series IP phones support simple-to-deploy and easy-to-manage by Flyingvoice's online platforms such as FACS and FRPS and auto-provisioning modes TFTP/HTTP/HTTPS, making mass deployment and maintenance extremely easy.

High Security, Strong Compatibility

P1X Series IP phones are well protected by configuration files with AES, SRTP and TLS call encryption, etc. They are widely compatible with SIP based devices and PBX platforms such as Broadsoft, Metaswitch and Yeastar, etc.

- 2.4" 320*240px color display with an adjustable backlight
- Dual Gigabit Ethernet ports(P11G only)
- 6-Way audio conference
- 2 SIP accounts
- HD voice
- Support RJ9 headset
- Support PoE (P11P/G only)
- Wall mountable
- Stand with 2 adjustable angles
- Opus

Model differentiation			
Model	P11	P11P	P11G
PoE	Not support	Support	Support
Internet	2*10/100Mbps	2*10/100/1000Mbps	2*10/100/1000Mbps
Phone Features			
LCD Screen	> 2.4" 320*240px color display with an adjustable backlight > 16-bit depth color		
Function Keys	> 7 Function Keys: message, headset, transfer, mute, redial, hands-free speakerphone, record > 4 Soft Keys, 4 navigate Keys, volume+/-		
SIP Accounts	> 2 SIP accounts		
Wi-Fi	> No support		
USB Port	> No support		
Ethernet Ports	> 2*10/100M (P11/P) > 2*10/100/1000M (P11G) > Support PoE (except P11)		
Other Ports	> 1 x RJ9 handset port, 1 x RJ9 headset port		
Call Features			
Basic Function	> Call hold, mute, DND, redial, auto answer, one-touch speed dial, Hotline, SMS, call forward, call waiting, Call transfer (attended/blind), paging, voice mail, anonymous call, anonymous call rejection, message waiting indicator (MWI)		
Direct IP Call	> Support		
Phone Book	> 2000 records; phonebook search/import/export; XML/LDAP remote phonebook; black list		
Call History	> 60 records; call history: all/missed/dialed/received		
6-Way Audio Conference	> Support		
Audio Features			
HD Voice	> HD handset, HD speaker		
Audio Codec	> G.722, Opus, AMR-WB(Optional), G.711WB(Optional), G.711(A/u), iLBC, G.729A/B, G.723, G.726, AMR-NB(Optional)		
DTMF	> In-band, RFC 2833, SIP info		
Other Features	> AEC, VAD, CNG, PLC, AGC, AJB		
Network			
Network Safety	> SIP Related Features: - SIP v1 (RFC2543), v2 (RFC3261), NAT Traversal by STUN - SIP link mode: proxy mode and peer-to-peer SIP link mode - Call server redundancy supported > Network Features: - Static IP and DHCP, IPv4 /IPv6, Dual stack IPv4/IPv6, ARP/RARP, DNS A/DNS SRV/DNS NAPTR, - LLDP/CDP/DHCP VLAN; IEEE802.1X; OpenVPN; DSCP, 802.1p QoS; SSL > Time and Date Synchronization: SNTP, PBX, DHCP > Transport: UDP/TCP/TLS; RTP/RTCP/SRTP		

Configuration & Maintenance

Auto-provision	<ul style="list-style-type: none"> > TR069 (TR104/TR106) > FTP/TFTP/HTTP/HTTPS for Auto Provisioning > Cloud device management: FACS > Cloud device management: FRPS > DHCP Option66
Configuration	<ul style="list-style-type: none"> > Supports Web configuration > Factory reset, reboot > Packet capture, system log

Others


Physical Features	<ul style="list-style-type: none"> > New Stand, wall mountable > AC/DC Adapter, AC Input: 100~240V, 50~60Hz > DC Output: 5V, 0.6A > Power consumption (PSU): 0.87~1.18W > Power consumption (PoE): 0.72~1.78W > Relative humidity: 10%~90% (No Condensing) - Storage temperature: -25~ 65°C - Operation temperature: 0~45°C > Dimension (W x D x H): 200mm x 165mm x 47mm
--------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Package Content

Details	<p>Packing List:</p> <ul style="list-style-type: none"> > Flyingvoice P11/P11P/P11G IP phone, power adapter (P11P/G optional) > Handset with handset cord, Ethernet cable, stand > Quick Start Guide <p>Size:</p> <ul style="list-style-type: none"> > Qty/CTN: 10 PCS, N.W/CTN: 7.5 kg, G.W/CTN: 9.47 kg > Giftbox size: 288mm x 217mm x 60mm > Carton size: 448mm x 320mm x 302mm
----------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Certification & Compatibility

Certificated by	
Compatible with	

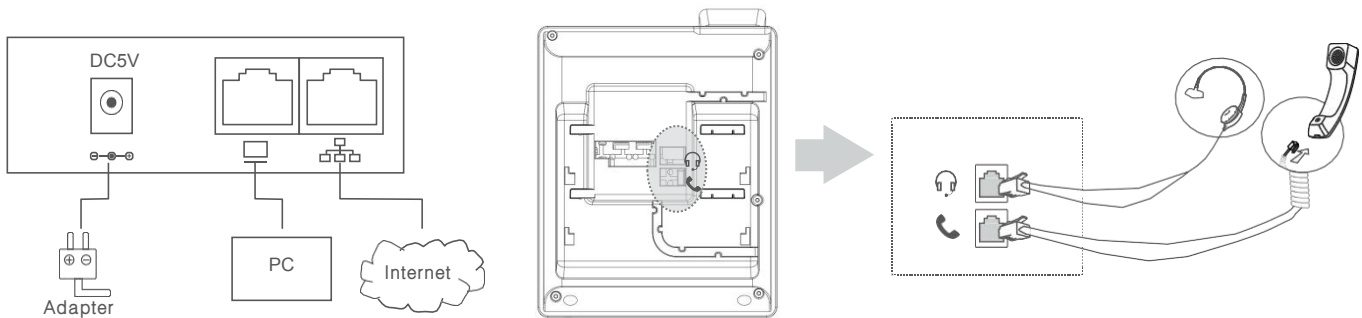

About Flyingvoice

Flyingvoice is a leading manufacturer of VoIP phones, VoIP adapters and VoIP routers, which are widely used throughout the world and highly praised by international carriers, ITSP, ISP and company users.

Driven by ongoing innovation of VoWLAN, Flyingvoice is committed to making easier VoIP products by enabling the enterprise network and united communication. Our people are continuously improving our products and expanding product applications tailored to client's requirements, which make you collaborate securely, effectively and efficiently – anytime & anywhere.

Copyright

Copyright © Flyingvoice Network Technology Co., Ltd. All rights reserved. No parts of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Flyingvoice Network Technology Co., Ltd.

Technical Support

Visit www.flyingvoice.com for product documents and FAQ, or contact Flyingvoice by email at support@flyingvoice.com. We'll get you the help you need.



Flyingvoice Network Technology Co., Ltd. Website:

Web: www.flyingvoice.com

Add: 1801-1802, Building 1, Chongwen Park, Nanshan Zhiyuan, Nanshan District, Shenzhen, China

Copyright© Flyingvoice Network Technology Co., Ltd. All Rights Reserved